




New Kit
CLIPS+WEDGES
+CLAMP

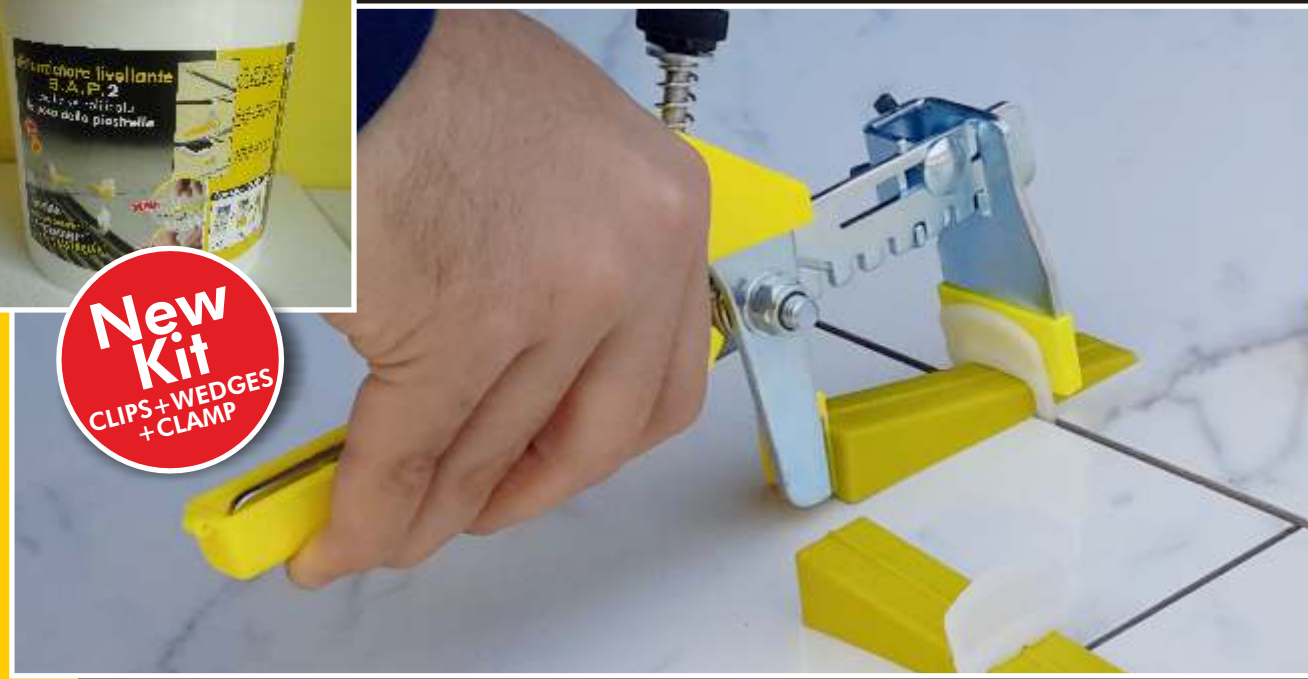

www.andalsystem.it

tile levelling spacers

S.A.P.3

simplify tile installation



COVERAGE CHART PER SQUARE METER ACCORDING TO THE TILE FORMAT

X cm	10	15	20	25	30	33	40	45	50	60	80	90	100	120	Y cm
10															
15															
20															
25															
30							44								
33						40	36								
40					40	33	30	25							
45	44	29	22	35	29	27	22	20							
50	40	26	20	32	26	24	20	18	16						
60	33	22	16	26	22	20	16	15	13	11					
80	37	25	18	20	16	15	12	11	10	8	9				
90	33	22	16	22	18	16	13	12	11	9	8	7			
100	30	20	15	20	16	15	12	11	10	8	7	6	6		
120	25	16	12	16	13	12	10	9	8	7	6	5	5	5	
	10	15	20	25	30	33	40	45	50	60	80	90	100	120	Y cm

EXAMPLE 1: tile format 23,64"x 23,64" (60x60 cm) = quantity per square meter: 11 pcs (2 pcs each X side + 2 pcs each Y side)
 EXAMPLE 2: tile format 35,46"x 5,91" (90x15 cm) = quantity per square meter: 22 pcs

RECOMMENDED BY



info@andalsystem.it www.andalsystem.it - Infoline: +39 (0)962. 431436



Large-format rectified porcelain produced by ceramic factories needs a more precise and accurate installation. The **S.A.P. 3** leveling spacer is designed to improve the tile installation and oversimplify the work of the installer and achieve an excellent result.

WHAT IS A LEVELING SPACER?

The leveling spacer is an installation system for floor tiles and wall tiles of big rectified formats.

WHERE TO USE S.A.P. 3

Thin tiles (Kerlite, Slimtech)
 Rectified floor tiles
 Rectified wall tiles
 Large-format tiles

WHY TO USE

For a perfect tile-to-tile leveling
 Prevents tile from moving during the installation
 Virtually eliminates lippage
 Decreases callbacks due to poor installation

HOW TO USE


Slide two clips under the tile and into the mortar approximately 2" from each end of the tile.
 Place the second tile.
 Slide the reusable wedges into the hole at the top of the clip, pushing it as tight as possible. To facilitate this operation, use the optional traction-adjustable pliers. Check for the alignment of the grout joints and move on to the next tile. **No special tools are required!**
 Once the mortar sets, simply kicks the clips in the same direction as the grout joints and it will break off at the base.
 Go through and pick up all the wedges, which are reusable several times. For your next project, you will only need to purchase more clips.

save your time
improve your results
eliminate costly call backs



installation
2 TIMES FASTER
100% GUARANTEED
 CUSTOMERS SATISFIED

Available for 1 mm grout joint!

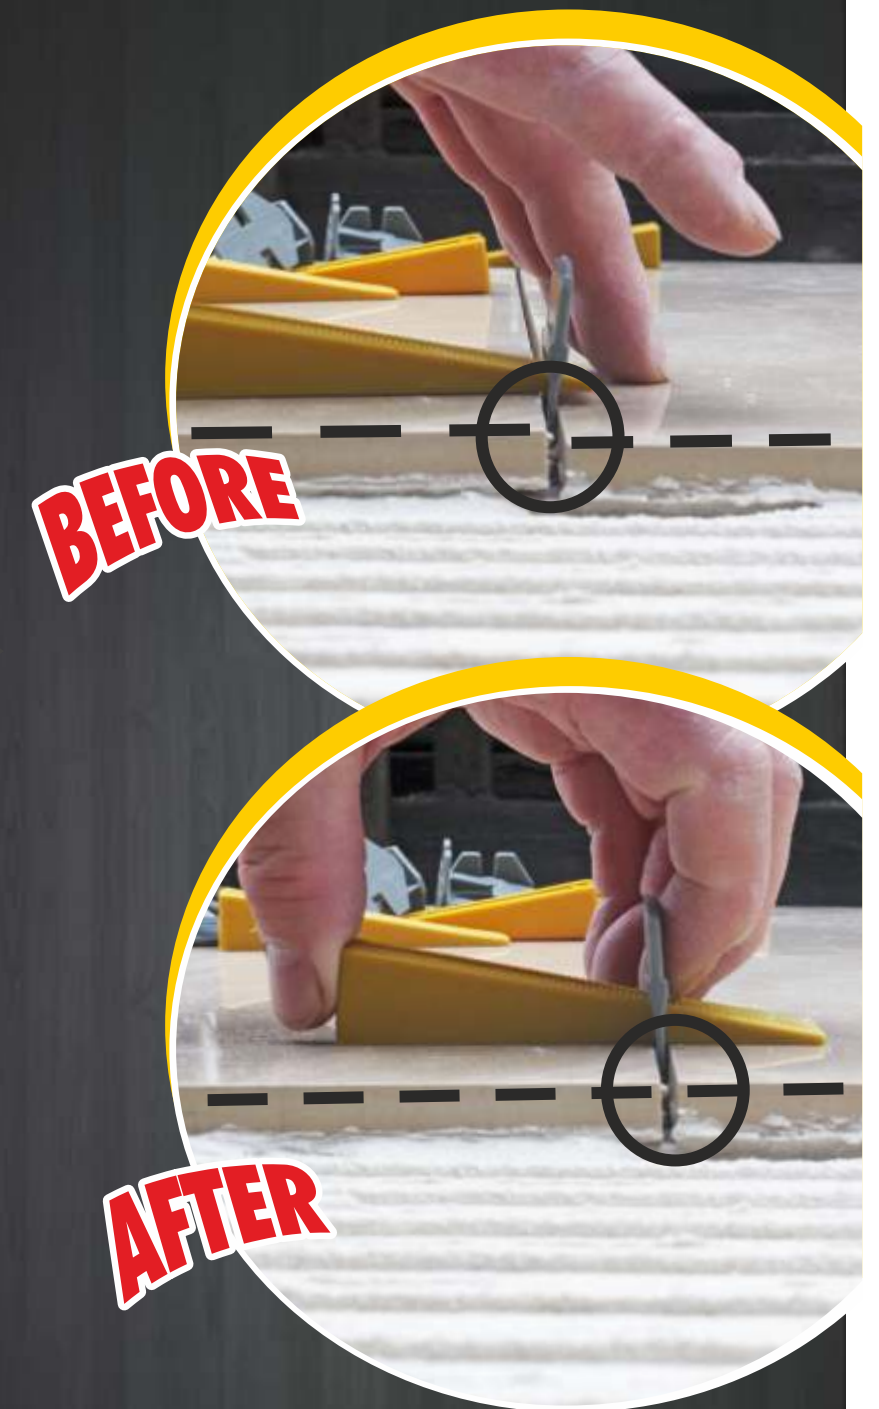

FAQs

Q.: Why should I use the SAP3 system?

A.: The SAP3 system offers many benefits to the user:
 Virtually eliminates uneven tiles
 Very easy to learn and use at any skill level
 Requires minimal effort to install and remove
 Prevents tile from moving during the installation
 Speeds up installation process
 No more gaps from shrinkage between tiles
 Decreases call backs due to poor installation

Q.: What is the minimum joint required?

A.: The SAP3 system allows a minimum joint of 0,07"

Q.: What if I need a larger joint?

A.: The SAP3 system will be used along with normal spacers.

For further information, please visit our website www.andalsystem.it or contact our specialist +39 (0)962.431436